



	EHM
1300 kg trifase	
↑ +1200 kg	
↑↑ +1100 kg	
↑↑↑ +1000 kg	
↑↑↑↑ +900 kg	
↑↑↑↑↑ +800 kg	
↑↑↑↑↑↑ +700 kg	
↑↑↑↑↑↑↑ +600 kg	
↑↑↑↑↑↑↑↑ +500 kg	
	EHPM

PIATTAFORMA DI TRASPORTO / MONTACARICHI TRANSPORT PLATFORM / MATERIAL HOIST


Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 2500/10 trifase	EHM 2500/10 trifase
Capacità di carico	Capacity	Charge Nominale	Capacidad de carga	1300 kg	1300 kg
Velocità di sollevamento	Lifting speed	Vitesse de levage	Velocidad de elevación	12 m/min	20 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	3,08 x 1,64 m	3,08 x 1,64 m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415 V 50/60 Hz	380/415 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	25 A	32 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	2 x 3 kW	2 x 4 kW
Corrente di spunto	Starting current	Amperage au démarrage	Intensidad de arranque	90 A	130 A

Compatibile con:
Interchangeability:


- EHM 2500/10
- EHM 2500/15
- EHM 2500/25
- EHM 2500/35
- EPHM 2500/10
- EPHM 2500/15
- EPHM 2500/25
- EPHM 2500/35
- EHP 1200
- EHP 1500

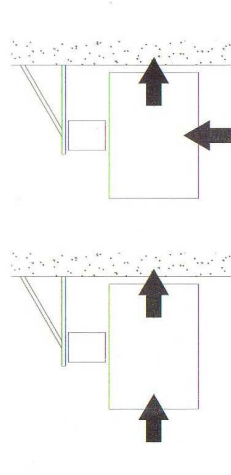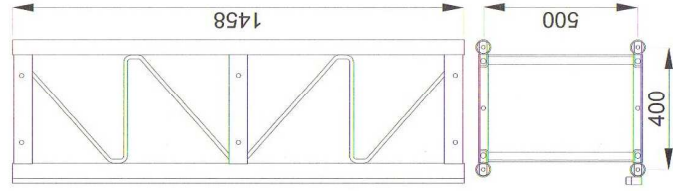


Configurazioni d'accesso possibili
Possible access configurations

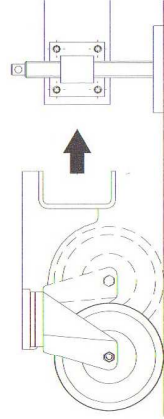

Kit ruote pivotanti
per movimentazione a terra
Rotating wheel kit
for quick positioning



Quattro vitoni di livellamento
Four levelling screw-jacks

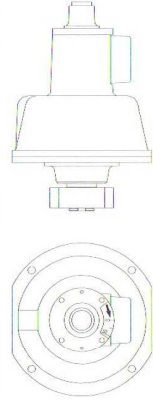

Freno d'emergenza
ad arresto progressivo

